



Less expensive than extended term blankets, and less soil preparation is required



Twice the longevity with the same effectiveness and cost-savings as other hydraulic applications




Effective immediately and grass grows twice as fast as blankets

Proven Two-Year Protection from a Superior Hydraulic Application

CocoFlex™ Extended Term-Flexible Growth Medium™ (ET-FGM™) can last up to twice as long as Flexterra® HP-FGM®, making this the highest-performing, longest-lasting hydraulically applied erosion control product on the market. The patented technology requires no cure time and provides superior slope protection over erosion control blankets and Bonded Fiber Matrix (BFM) products. Additionally, CocoFlex ET-FGM can be combined with other erosion control technologies, such as Turf Reinforcement Mats (TRMs), to accommodate a broad range of applications.

CocoFlex ET-FGM Advantages:

- Designed with blended coconut and wood fibers, crimped interlocking fibers and additives that are engineered to perform under extreme conditions
- Unmatched performance — > 99% effectiveness translates to superior erosion protection on slopes > 0.25H:1V
- Faster growth establishment — 1500% water-holding capacity retains more moisture on the seedbed for faster germination and accelerated growth
- Over 100 times less soil loss per acre than alternative products

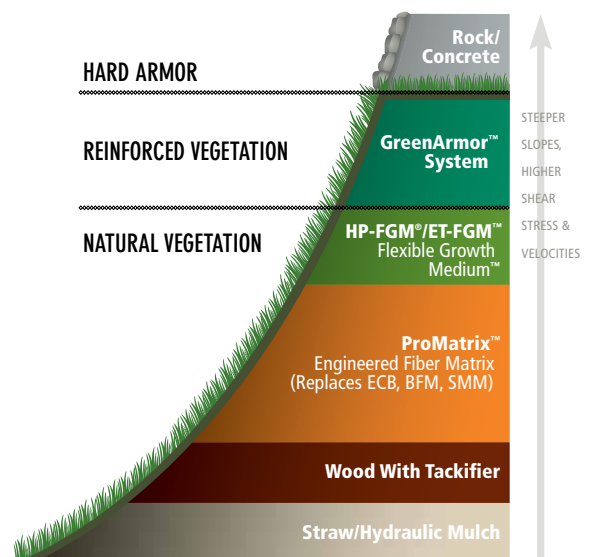

CocoFlex™ ET-FGM™ Technical Data:

	TEST METHOD	UNITS	TESTED VALUE
PHYSICAL PROPERTIES			
Mass Per Unit Area	ASTM D6566 ¹	g/m ² (oz/yd ²)	≥ 390 (11.6)
Thickness	ASTM D6525 ¹	mm (in)	≥ 5.8 (0.23)
Ground Cover	ASTM D6567 ¹	%	≥ 99
Water-Holding Capacity	ASTM D736 ⁷	%	≥ 1,500
Material Color	Observed	n/a	Green
PERFORMANCE PROPERTIES			
Cover Factor ²	Large Scale ⁴	n/a	≤ 0.01
% Effectiveness ³	Large Scale ⁴	%	≥ 99
Vegetation Establishment	ASTM D7322 ¹	%	≥ 500
Functional Longevity ⁵	ASTM D5338	months	≤ 24

1. ASTM test methods developed for Rolled Erosion Control Products and have been modified to accommodate hydraulically applied erosion control products.

2. Cover Factor is calculated as soil loss ratio of treated surface versus an untreated control surface.

3. % Effectiveness = One minus Cover Factor multiplied by 100%.

4. Large scale testing conducted at Utah Water Research Laboratory. For specific testing information please contact a Profile technical service representative at 800-508-8681 (US and Canada) or +1-847-215-1144 (International).

5. Functional Longevity is the estimated time period, based upon ASTM D5338 testing and field observations, that a material can be anticipated to provide erosion control and agronomic benefits as influenced by composition, as well as site-specific conditions, including; but not limited to – temperature, moisture, light conditions, soils, biological activity, vegetative establishment and other environmental factors.

COMPOSITION

Thermally Processed Wood Fibers* 59%

Coconut Fibers 24%

Wetting Agents - Including high-viscosity colloidal polysaccharides, cross-linked biopolymers and water absorbents 10%

Crimped, Biodegradable Interlocking Fibers 7%

* Heated to a temperature greater than 380 degrees Fahrenheit (193 degrees Celsius) for 5 minutes at a pressure greater than 50 psi (345 kPa) in order to be Thermally Refined®/Processed and to achieve phytosanitization.

INSTALLATION

Strictly comply with equipment manufacturer's installation instructions and recommendations. Use approved hydroseeding machines with fan-type nozzle (50-degree tip). To achieve optimum soil surface coverage, apply ET-FGM from opposing directions to soil surface. Rough surfaces (rocky terrain, cat tracked and ripped soils) may require higher application rates to achieve 100% cover. Slope interruption devices or water diversion techniques are recommended when slope lengths (3H:1V) exceed 125 ft (38 m).

Erosion Control and Revegetation:

For maximum performance, apply ET-FGM in a two-step process:

Step One: Apply fertilizer, other soil amendments and 50% of seed with a small amount of ET-FGM for visual metering.

Step Two: Mix balance of seed and apply ET-FGM at a rate of 50 lb per 125 gal (22.7 kg/475 L) of water over freshly seeded surfaces. Confirm loading rates with equipment manufacturer. Do not leave seeded surfaces unprotected, especially if precipitation is imminent.

Depending upon site conditions ET-FGM may be applied in a one-step process where all components may be mixed together in single tank loads.

SLOPE GRADIENT/CONDITION	ENGLISH	SI
≤ 4H to 1V	2,500 lb/ac	2,800 kg/ha
> 4H to 1V and ≤ 3H to 1V	3,000 lb/ac	3,360 kg/ha
> 3H to 1V and ≤ 2H to 1V	3,500 lb/ac	3,920 kg/ha
> 2H to 1V and ≤ 1H to 1V	4,000 lb/ac	4,480 kg/ha
> 1H to 1V	4,500 lb/ac	5,040 kg/ha
Below ECB or TRM	1,500 lb/ac	1,680 kg/ha

Consult comprehensive CSI formatted ET-FGM specification for additional details.

PACKAGING

Bags: Net Weight - 50 lb (22.7 kg)

UV and weather-resistant plastic film

Pallets: 40 bags/pallet, 1 ton (907 kg)/pallet

Weather-proof, stretch-wrapped with UV resistant pallet cover



**GREEN DESIGN
ENGINEERING™**
EARTH-FRIENDLY SOLUTIONS
FOR SUSTAINABLE RESULTS™

Green Design Engineering™ is a holistic approach that combines agronomic and engineering expertise with advanced technologies to provide cost-effective and earth-friendly solutions. Profile strives to deliver Green Design Engineering across our team of consulting professionals, innovative products and educational resources.



PS³ is a free, comprehensive 24/7 online resource you can use to design a project and select the right products that address both the physical and agronomic needs of your site. It will help you develop holistic, sustainable solutions for cost-effective erosion control, vegetation establishment and subsequent reductions in sediment and other pollutants from leaving disturbed sites. Because good plans start with the soil, PS³ offers free soil testing to ensure this critical step is considered. To access the site, design your project and take advantage of a free soil analysis, visit profileps3.com.



Solutions for your Environment™

For technical information or distribution, please call 800-508-8681.
For customer service, call 800-366-1180.

For warranty information, visit profileproducts.com.

750 W. Lake Cook Road • Suite 440
Buffalo Grove, IL 60089

profileproducts.com

© 2019 PROFILE Products LLC.
All rights reserved.

Profile, Thermally Refined, Flexterra and HP-FGM are registered trademarks of PROFILE Products LLC.
CocoFlex, ET-FGM, Extended Term-Flexible Growth Medium, Flexible Growth Medium, GreenArmor, ProMatrix, Solutions for your Environment, Green Design Engineering and Earth-Friendly Solutions for Sustainable Results are trademarks of PROFILE Products LLC.



Find us on facebook.com/profileEVS



Bowman
Construction
Supply Inc.



Quick
Supply Co.



Cascade
GEOSYNTHETICS

LOCATIONS & CONTACT INFO

ASP ENTERPRISES

aspent.com
salesasp@aspent.com

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com
salesbcs@bowmanconstructionsupply.com

QUICK SUPPLY CO.

quicksupplyco.com
salesquick@quicksupplyco.com

CASCADE GEOSYNTHETICS

cascadegeos.com
salescascade@cascadegeos.com

St. Louis, MO
636.343.4357
Kansas City, MO
816.554.1191
Omaha, NE
402.861.8579
Wichita, KS
316.393.1554

Denver, CO
303.696.8960
Colorado Springs, CO
719.257.7840
Loveland, CO
970.535.0863

Des Moines, IA
515.289.1271

Portland, OR
971.339.1020

SOLUTIONS WE SUPPLY

GEOSYNTHETICS

Filter Fabrics

Stabilization Fabrics

Geogrids

- Road Grids
- Wall Grids
- Slope Stabilization

Specialty Fabrics

Composite Geomembranes

- GCLs, PVC, HDPE, LLDPE, EPDM, Granular Bentonite

SEDIMENT CONTROL

Inlet Protection

- Grated Inlet, Curb Inlet, Area Inlet Protection

Ditch Checks

- Triangle Silt Dike
- GeoRidge

Perimeter Protection

- High and Low-Porosity Silt Fence, Straw Wattles, Silt Socks
- Safety Fence

Flocculants & Water Treatment

- Polymer-Based & Natural Flocculants

Sediment Basin Skimmers

Dewatering Bags

Trackout Control

- FODS
- Rumble Grates

Turbidity Curtains

EROSION CONTROL

Basic Hydraulically Applied Mulches

- Wood
- Paper
- Blends
- Straw

High-Performance Hydraulically

Applied Products

- BFM
- FGM
- Additives & Tackifiers

Temporary Erosion Control Blankets

- Coir & Jute Mat/Nettings
- Short-Term ECBs
- Extended-Term ECBs

Permanent Erosion Control Blankets

- Turf Reinforcement Mats
- HP-TRMs
- Anchor Reinforced Vegetation System

Structural BMPs

- Transition Mats
- Geoweb Cellular Confinement
- Composite Vegetated Armor System
- Flex MSE Vegetated Wall System
- Articulated Concrete Block
- Gabions
- Grout-Filled Geotextile Mats

Vegetation Establishment

- Native Seed & Turf Seed
- Fertilizers
- Organic Soil Additives
- Stratavault Soil Cells

STORMWATER MANAGEMENT

Water Quality

- Inlet Filter Boxes
- Pre-Treatment Chamber
- Nutrient Separating Baffle Boxes
- High-Flow Biofiltration Media
- Hydrodynamic Separators
- Stratavault

Water Quantity

- Modular Underground Storage Systems
- Chamber Detention Systems

Drainage

- HDPE Swale Liner
- Pipe & Fittings
- Drainage Composites
- Strip Drain

Inlet Structures

- PVC
- Drain Basins, In-Line Drains
- Landscape

Permeable Pavers

- Permeable Articulating Concrete Block
- Grass Pavers
- Gravel Pavers
- Concrete Pavers

SPECIALTY

Natural & Synthetic Coir Fiber Logs

Vegetated Reinforced Soil Slopes

Soil Anchors

Root Barrier System

AquaBlok

Muscle Wall

We are full line distributors of construction materials for all project types. Contact us for assistance with a project. From specification and development to installation and completion, we're here to help with all of your site solution needs.

**GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
SEDIMENT CONTROL | REVEGETATION & SOIL AMENDMENTS**