# LINEOTM DIMENSIONAL STONE



THICKNESS 100MM

REGION CHICAGO







**UNILOCK** Exclusive Technologies


ENDURACOLOR



#### **APPLICATIONS**

Note: Not all sizes are suitable for every application.



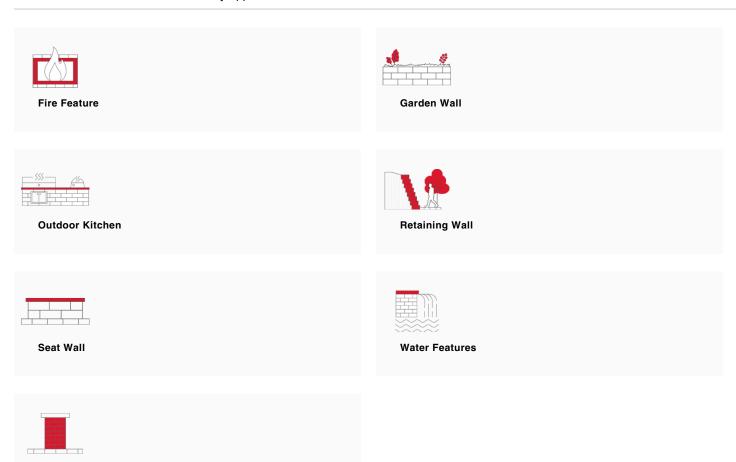

#### **COLORS**

**Pillars** 

RIVER FINISH: CLASSIC





#### LARGE RECTANGLE 500mm x 100mm x 200mm 19 3/4" x 3 7/8" x 7 7/8"



## RECTANGLE 400mm x 100mm x 200mm 15 3/4" x 3 7/8" x 7 7/8"







#### GRANITE FINISH: CLASSIC





XL RECTANGLE 600mm x 100mm x 200m

600mm x 100mm x 200mm 23 5/8" x 3 7/8" x 7 7/8"



LARGE RECTANGLE

500mm x 100mm x 200mm 19 3/4" x 3 7/8" x 7 7/8"



**RECTANGLE** 

400mm x 100mm x 200mm 15 3/4" x 3 7/8" x 7 7/8"



**SMALL RECTANGLE** 

300mm x 100mm x 200mm 11 7/8" x 3 7/8" x 7 7/8"

SIERRA FINISH: CLASSIC





XL RECTANGLE

600mm x 100mm x 200mm 23 5/8" x 3 7/8" x 7 7/8"



#### LARGE RECTANGLE

500mm x 100mm x 200mm 19 3/4" x 3 7/8" x 7 7/8"



**RECTANGLE** 

400mm x 100mm x 200mm 15 3/4" x 3 7/8" x 7 7/8"



**SMALL RECTANGLE** 

300mm x 100mm x 200mm 11 7/8" x 3 7/8" x 7 7/8"

GRAPHITE FINISH: CLASSIC





#### LARGE RECTANGLE

500mm x 100mm x 200mm 19 3/4" x 3 7/8" x 7 7/8"



#### RECTANGLE

400mm x 100mm x 200mm 15 3/4" x 3 7/8" x 7 7/8"



#### **SMALL RECTANGLE**

300mm x 100mm x 200mm 11 7/8" x 3 7/8" x 7 7/8"




#### XL RECTANGLE

600mm x 100mm x 200mm 23 5/8" x 3 7/8" x 7 7/8"



#### **TYPICAL CROSS SECTION**

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

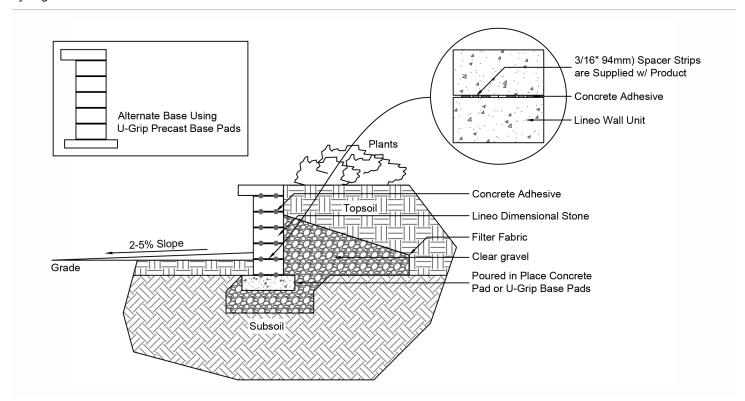





	(100) RANDOM RANDOM BUNDLE	PILLAR UNIT
UNIT THICKNESS (MM)	100	100
LAYERS PER BUNDLE	3	3
FCFT PER BUNDLE	31.91	29.97
FCFT PER LAYER	10.64	9.99
FCFT PER UNIT	0.51	0.33
UNITS PER BUNDLE	63	90
UNITS PER LAYER	21	30
LBS PER BUNDLE	2,845	2,670
LBS PER LAYER	948.33	890
LBS PER UNIT	45.16	29.67

#### **INSTALLATION NOTES**



#### LINEO™ DIMENSIONAL STONE

Lineo Dimensional Stone is a modern version of the well known Brussels Dimensional Stone family. Lineo is the un-tumbled version with uniquely modern features.

Applications – Design and build projects such as planters, steps, grill islands, pillars, seat walls and water features. Recommended for straight applications only.

Capacity - walls up to 2 ft. (60 cm) in height and hardscape features up to 4 ft. (1.2m)

Recommended Base Stabilization – one layer of DriveGrid™ stabilization grid between subgrade and base material. Use under Standard Base or Permeable Base.

Standard Base – Min. 6" - 8" of 34" Crusher Run gravel (any road base standard in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Alternative Permeable Base – Min. 6" - 8" of 3'4" clear open-graded stone compacted to achieve full particle lock-up and consolidation. (Clear open-graded does not compact but does consolidate slightly by rattling the particles together).

Leveling – Leveling retaining wall blocks directly on top of gravel is tedious and generally does not yield the best results. U-Grip Base units or universal base pads are recommended under all Unilock walls for improved accuracy and speedier installation. Additional benefits include long term structural integrity and an overall better appearance. Poured concrete leveling pads, reinforced with rebar, are also a great way to accomplish leveling, particularly for larger installations. You must ensure that the concrete is poured and finished perfectly in order to achieve a good visual appearance.

Connection – Lineo has small spacer strips that are placed between the blocks during construction to create a 3/16" (4mm) gap between units. Lineo relies on a concrete adhesive for connection between units. In order to make a connection between blocks, the adhesive must be "mounded" higher than 3/16" (4mm) in evenly spaced blobs so that it adheres the units together. Always read adhesive manufacturers' directions prior to gluing.

Handling - Handle carefully so you don't chip the nice crisp edges.

Coping - This wall does not require coping, but coping is generally used to complete the installation visually. Choose a manufactured coping such as Unilock Universal Coping or any of our natural stone coping options. Install with tight joints or 3/16" gap between units and amend with an exterior latex caulking. Cutting may be required; a diamond blade saw is required to cut coping properly. Glue all coping using a specially formulated concrete adhesive that is strong and will not break down over time. Always read adhesive manufacturers' directions prior to gluing.

Unilock reserves the right to change product information without notice.

PDF Generated May 15, 2025











### **DISTRIBUTED BY:**

ASP Enterprises, Quick Supply Co., Bowman Construction Supply & Cascade Geosynthetics are sister companies that serve customers from the Midwest, across the Rocky Mountains to the Pacific Northwest. Together we supply customers with a variety of environmental construction materials including erosion and sediment control, geosynthetics, stormwater management, drainage products, hardscapes and outdoor living, revegetation and soil amendments, waterproofing solutions and more.



We are full line distributors of environmental construction materials for all project types. Contact us for assistance with a project or a quote on products. From specification recommendations and project development to installation and completion, we're here to help with all of your site solution needs. Our warehouses are stocked with readily available inventory and we offer same and next-day deliveries.

#### **ASP ENTERPRISES**

#### aspent.com

salesasp@aspent.com

#### ST. LOUIS

1099 Cassens Industrial Ct. St. Louis, MO 63026 636-343-4357

#### **KANSAS CITY**

5301 E 59th St. Kansas City, MO 64130 816-554-1191

#### ОМАНА

15263 Cooper St. Omaha, NE 68138 402-861-8579

#### **WICHITA**

316-393-1554

#### **WENTZVILLE**

1906 E Service Rd. HWY 61 N Wentzville, MO 63385 636-445-9090

#### QUICK SUPPLY CO.

#### quicksupplyco.com

salesquick@quicksupplyco.com

#### DES MOINES

6620 NW Toni Dr. Des Moines, IA 50313 515-289-1271

#### **BOWMAN CONSTRUCTION SUPPLY**

#### bowmanconstructionsupply.com

salesbcs@bowmanconstructionsupply.com

#### DENVER

10801 E. 54th Ave. Denver, CO 80239 303-696-8960

#### **COLORADO SPRINGS**

1830 Palmer Park Blvd. Colorado Springs, CO 80909 719-257-7840

#### LOVELAND

4495 Woods Ave. Loveland, CO 80538 970-535-0863

#### **CASCADE GEOSYNTHETICS**

#### cascadegeos.com

salescascade@cascadegeos.com

#### PORTLAND

3610 N. Suttle Rd. Bldg B Portland, OR 97217 971-339-1020

#### **SALT LAKE CITY**

425 N. Neil Armstrong Rd. Salt Lake City, UT 84116 435-276-0820