

WESTPORT™

THICKNESS 70MM
REGION CHICAGO



EDGE
ZERO EDGE DETAIL




UNILOCK Exclusive Technologies

CLASSIC COAT




APPLICATIONS


Note: Not all sizes are suitable for every application.



Borders and Accents



Driveway



Patio & Walkway

COLORS

GRANITE
FINISH: CLASSIC



- 

LARGE RECTANGLE
254mm x 380mm x 70mm
10" x 15" x 2 3/4"
- 

RECTANGLE
127mm x 254mm x 70mm
5" x 10" x 2 3/4"
- 

SQUARE
254mm x 254mm x 70mm
10" x 10" x 2 3/4"

SIERRA
FINISH: CLASSIC



- 

LARGE RECTANGLE
254mm x 380mm x 70mm
10" x 15" x 2 3/4"
- 


RECTANGLE
127mm x 254mm x 70mm
5" x 10" x 2 3/4"
- 

SQUARE
254mm x 254mm x 70mm
10" x 10" x 2 3/4"


RIVER
FINISH: CLASSIC



LARGE RECTANGLE
254mm x 380mm x 70mm
10" x 15" x 2 3/4"



RECTANGLE
127mm x 254mm x 70mm
5" x 10" x 2 3/4"



SQUARE
254mm x 254mm x 70mm
10" x 10" x 2 3/4"

CHARCOAL
FINISH: CLASSIC




5"X10"
127mm x 254mm x 70mm
5" x 10" x 2 3/4"

JOINT SPACING = 3-7MM


LAYING PATTERNS

LP Westport Fixed Random G
LP WESTPORT FIXED RANDOM G




LP WESTPORT 5X10 RB C

LP Westport Fixed Random E
LP WESTPORT FIXED RANDOM E



LP WESTPORT 5X10 SB D




LP WESTPORT FIXED RANDOM A

LP Westport Fixed Random F
LP WESTPORT FIXED RANDOM F

TYPICAL CROSS SECTION

Note: Base, screed bed, infill aggregates and or reinforcements may vary based on project requirements or as specified by engineer.

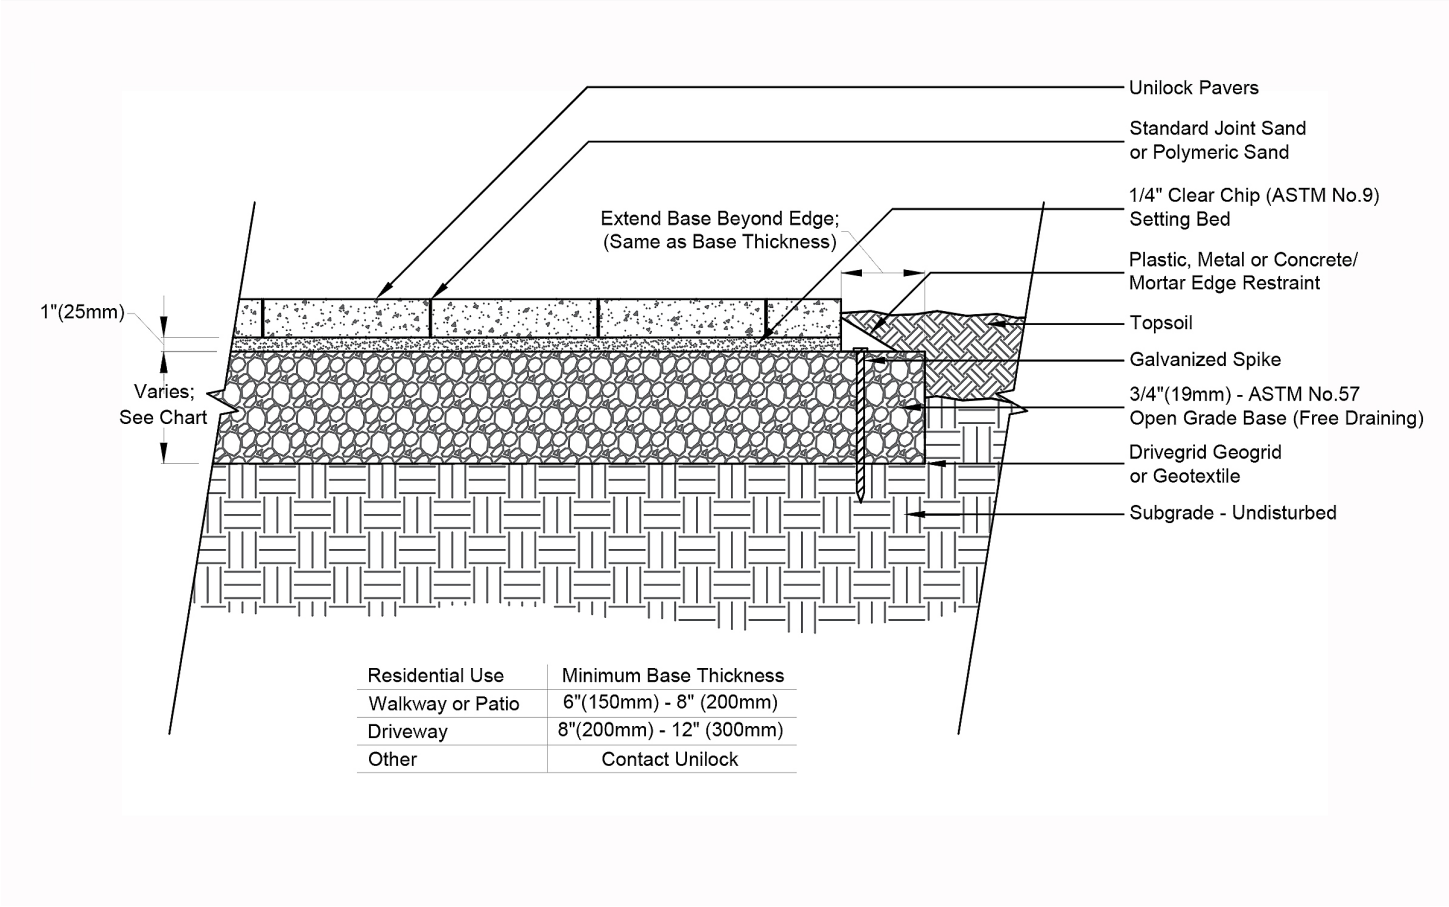

PACKAGING

	(70) RANDOM RANDOM BUNDLE	5"X10"
UNIT THICKNESS (MM)	70	70
LAYERS PER BUNDLE	8	8
SQ FT PER BUNDLE	94.19	94.19
SQ FT PER LAYER	11.77	11.77
SQ FT PER UNIT	0.59	0.34
UNITS PER BUNDLE	160	280
UNITS PER LAYER	20	35
LIN FT PER BUNDLE - SOLDIER	66.67	-
LIN FT PER LAYER - SOLDIER	8.33	-
LIN FT PER UNIT - SOLDIER	0.24	-
LIN FT PER BUNDLE - SAILOR	116.56	133.33
LIN FT PER LAYER - SAILOR	14.57	16.67
LBS PER BUNDLE	2,976	2,884
LBS PER LAYER	372	360.50
LBS PER UNIT	18.60	10.30

INSTALLATION NOTES

The classic appeal of multiple shapes makes Westport an all-time favorite. Gentle surface clefts and clean edges give Westport an elegant and relaxed look. The varying rectilinear stone sizes, provide for that classic flagstone appearance that is compatible for both traditional and modern landscapes.

Recommended Base Stabilization – one layer of DriveGrid™ stabilization grid between subgrade and base material. Recommended depth 8" to 10" below pavers for maximum stability and performance. Use under Standard Base or Permeable Base.

Standard Base – Min. 6" – 8" of ¾" Crusher Run gravel (any road base standard in accordance with ASTM-D2940) compacted to 98% Standard Proctor Density (SPD).

Standard Bedding Course – 1" thick of coarse sand– in accordance with ASTM-D2940 screeded over base.

Alternative Permeable Base – Min. 6" – 8" of ¾" clear open-graded stone compacted to achieve full particle lock-up and consolidation. (Clear open-graded does not compact but does consolidate slightly by rattling the particles together.)

Alternative Permeable Bedding Course – 1" thick of 1/4" clear open-graded chip stone – (ASTM No. 8) screeded over base.

Special Note: Concrete Direct Overlay – In some areas of the country and in some applications pavers are very successfully placed directly over concrete. Concrete as a base is in itself quite strong, but it can affect the structural integrity of the paver particularly in vehicular applications, where the concrete below is sub-par. The following considerations must be taken into account to insure that the concrete below the surface is ideal:

1. Concrete integrity – concrete must be in good condition, and not crumbling
2. Drainage slope – concrete below must be sloped away from all buildings and structures
3. Drainage holes – In lowest areas of the concrete, drill 1" holes in concrete (on 12" centers) and fill holes with ¼" chip (ASTM No. 8)
4. Base drainage - the area below the concrete must not be subject to frost movement
5. Surface - surface must be totally smooth and flat equivalent to the desired finished surface
6. Waterproofing - may be required when installing pavers over concrete where there is a basement or cold cellar below. Install an impervious rubber membrane over the surface prior to installing any pavers over the surface.
7. Jointing Sand - Use an impervious polymeric sand when installing over concrete

Jointing Material and Joint Stabilization

All sands must meet ASTM C144 or C33 Specifications. For best appearance and optimal performance,, keep jointing materials approximately 1/8" below the chamfer (bevel edge) of the paver.

Good Option: Ordinary sharp jointing sand in accordance with ASTM C144 or C33. (Common name: Concrete Sand)

Best Option: Any polymeric sand or ordinary concrete sand stabilized by a water-based or solvent-based joint sand stabilizer sealer. Always follow manufacturer's application specifications and requirements.

Handling – This product has no special handling requirements.

Edge Restraint - Always install an edge restraint around the perimeter of any paver installation not restrained by building structures. Spike-in edge restraints come in plastic and metal and work well for most applications. A concrete curb or a sub-surface concrete wedge can also be installed to retain the edge.

Paver Compaction - Always use a protective polymer pad on the bottom of your compactor when doing the final compaction of the pavers. An alternative is to use a rubber-roller compactor for the final compaction.

Cleaners – Any cleaner specifically designed for pavers may be used for color restoration or general cleaning. Follow manufacturer's dilution rates and application procedures. Always test a small area to make sure the results are as expected.

Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers

- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

Jointing Material and Joint Stabilization

All sands must meet ASTM C144 or C33 Specifications. For best appearance and optimal performance,, keep jointing materials approximately 1/8" below the chamfer (bevel edge) of the paver.

Good Option: Ordinary sharp jointing sand in accordance with ASTM C144 or C33. (Common name: Concrete Sand)

Best Option: Any polymeric sand or ordinary concrete sand stabilized by a water-based or solvent-based joint sand stabilizer sealer. Always follow manufacturer's application specifications and requirements.

Handling – This product has no special handling requirements.

Edge Restraint - Always install an edge restraint around the perimeter of any paver installation not restrained by building structures. Spike-in edge restraints come in plastic and metal and work well for most applications. A concrete curb or a sub-surface concrete wedge can also be installed to retain the edge.

Paver Compaction - Always use a protective polymer pad on the bottom of your compactor when doing the final compaction of the pavers. An alternative is to use a rubber-roller compactor for the final compaction.

Cleaners – Any cleaner specifically designed for pavers may be used for color restoration or general cleaning. Follow manufacturer's dilution rates and application procedures. Always test a small area to make sure the results are as expected.

Sealers

- Product may be sealed for aesthetic or cleanliness reasons but it is not required
- Use any sealer approved for concrete pavers
- Select type for desired aesthetics
- Product must be cleaned before sealing
- Always read and follow manufacturer's application procedures
- Always test a small area to make sure the results are as expected

The Americans with Disabilities Act Accessibility Guidelines (ADAAG) provides measurable criteria to determine compliance, not individual product evaluation. Gaps, joints or openings, greater than ½" horizontal and ¼" vertical should be avoided as they can disrupt wheelchair maneuvering (United States Access Board – Guidelines and Standards).

Unilock reserves the right to change product information without notice.

PDF Generated May 22, 2025





DISTRIBUTED BY:

ASP Enterprises, Quick Supply Co., Bowman Construction Supply & Cascade Geosynthetics are sister companies that serve customers from the Midwest, across the Rocky Mountains to the Pacific Northwest. Together we supply customers with a variety of environmental construction materials including erosion and sediment control, geosynthetics, stormwater management, drainage products, hardscapes and outdoor living, revegetation and soil amendments, waterproofing solutions and more.



We are full line distributors of environmental construction materials for all project types. Contact us for assistance with a project or a quote on products. From specification recommendations and project development to installation and completion, we're here to help with all of your site solution needs. Our warehouses are stocked with readily available inventory and we offer same and next-day deliveries.

ASP ENTERPRISES

aspent.com

salesasp@aspent.com

ST. LOUIS

1099 Cassens Industrial Ct.
St. Louis, MO 63026
636-343-4357

KANSAS CITY

5301 E 59th St.
Kansas City, MO 64130
816-554-1191

OMAHA

15263 Cooper St.
Omaha, NE 68138
402-861-8579

WICHITA

316-393-1554

WENTZVILLE

1906 E Service Rd. HWY 61 N
Wentzville, MO 63385
636-445-9090

QUICK SUPPLY CO.

quicksupplyco.com

salesquick@quicksupplyco.com

DES MOINES

6620 NW Toni Dr.
Des Moines, IA 50313
515-289-1271

BOWMAN CONSTRUCTION SUPPLY

bowmanconstructionsupply.com

salesbcs@bowmanconstructionsupply.com

DENVER

10801 E. 54th Ave.
Denver, CO 80239
303-696-8960

COLORADO SPRINGS

1830 Palmer Park Blvd.
Colorado Springs, CO 80909
719-257-7840

LOVELAND

4495 Woods Ave.
Loveland, CO 80538
970-535-0863

CASCADE GEOSYNTHETICS

cascadegeos.com

salescascade@cascadegeos.com

PORTLAND

3610 N. Suttle Rd. Bldg B
Portland, OR 97217
971-339-1020

SALT LAKE CITY

425 N. Neil Armstrong Rd.
Salt Lake City, UT 84116
435-276-0820

**GEOSYNTHETICS | EROSION CONTROL | STORMWATER MANAGEMENT
REVEGETATION & SOIL AMENDMENTS | SEDIMENT CONTROL | HARDSCAPES**